

MECHANICAL POWER FEEDER

Eliminates hand feeding and increases efficiency of straight cutting operations. The feed direction is reversible and the infinitely variable feed speed makes it possible to feed all types of wood. Powered by a 1 HP motor the power feeder provides powerful and smooth feeding performance. Width is conveniently adjusted by turning a handwheel. Feed roller is covered for safety guard. The entire power feeder assembly is easy to mount on the table. If required, the roller surface can be laminated with rubber to prevent scratching on the workpiece surface.

MOD.: FHF-150




SPECIFICATIONS	
MODEL	FHF-150
LENGTH OF ROLLER	150mm
DIAMETER OF ROLLER	200mm
FEED SPEED	16~66 f.p.m variable
MOTOR	1 HP
AIR PRESSURE	Mechanical
FENCE ADJUSTMENT RANGE	120mm
FEED OPENING	125mm
NET WEIGHT	90kg
GROSS WEIGHT	110kg
FEEDER SIZE (LxWxH)	640*440*500mm
PACKING SIZE (LxWxH)	700*500*670mm
Design and specifications are subject to change without prior notice.	

PNEUMATIC POWER FEEDER

Eliminate hand feeding and increase the efficiency of straight cutting operations. The feed roller motion is controlled by an air cylinder, providing automatic and convenient adjustment for various stocks. The feeding pressure is adjustable. Width is conveniently adjusted by turning a handwheel. The feed roller running is driven by a 1 HP motor, providing powerful and smooth feeding performance. Feed roller is covered for added safety. Feed roller clamping and releasing motions are controlled by a foot switch for operation convenience. If required, the roller surface can be laminated with rubber to prevent scratching of the workpiece surface.

MOD.: FHF-150A

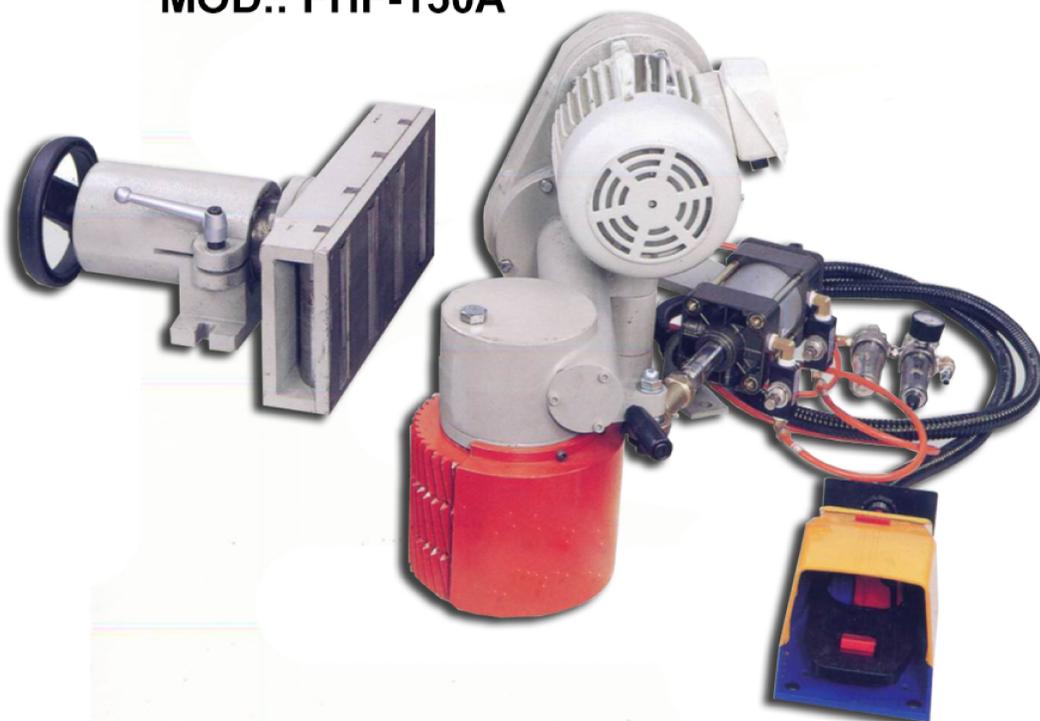

SPECIFICATIONS	
MODEL	FHF-150A
LENGTH OF ROLLER	150mm
DIAMETER OF ROLLER	200mm
FEED SPEED	16~66 f.p.m variable
MOTOR	1 HP
AIR PRESSURE	5kg/cm ²
FENCE ADJUSTMENT RANGE	120mm
FEED OPENING	125mm
NET WEIGHT	110kg
GROSS WEIGHT	130kg
FEEDER SIZE (LxWxH)	640*440*500mm
PACKING SIZE (LxWxH)	700*500*670mm
Design and specifications are subject to change without prior notice.	



FULLPOWER®

富堡實業有限公司

FULPOW INDUSTRIAL CORP.

7F-2, NO. 400, SEC. 1, CHANG PING ROAD, TAICHUNG, TAIWAN

TEL: 886-4-2243 9235 (REP.)

FAX: 886-4-2244 3829

E-MAIL: fulpow@ms7.hinet.net